




AQUAVISION

Technical Information

Model AVF 15-3 LCD



Bezel size

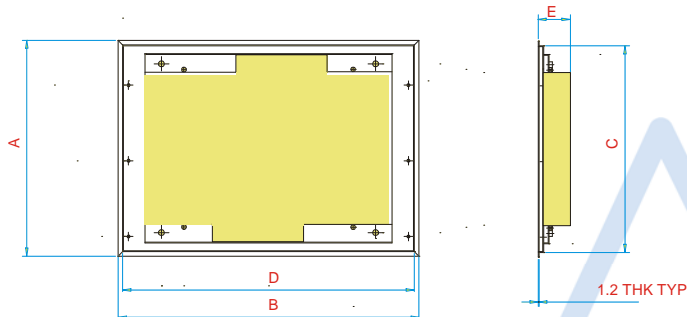

<u>Model</u>	<u>Screen Size</u>	<u>A</u> Overall Height	<u>B</u> Overall Width	<u>C</u> Cut out Height	<u>D</u> Cut out Width	<u>E</u> Max Depth
AVF-151-LCD	384mm	385mm	470mm	376mm	461mm	60mm

Screen

LCD TFT
WXGA 1024 x 768
PAL/SECAM-B/G, D/K, L
Full Auto Tuning
TeleText/FastText
Heated Screen

Inputs

1 x Scart (Fully Wired)
1 x Composite AV (Yellow, Red and White)
1 x S- Video
1 x PC D- Connector + 3.5mm Audio
1 x Analogue Tuner

Sound

Nicam Stereo
2 x 4 Watts (PMPO)
Graphic Equaliser

Power

Auto sensing 90-240VAC
12 volts DC Transformer with 4m low voltage lead.
Power Consumption 45W
Standby Consumption <3w

Optional

Hard wired control panel with switch mimic connection.

Speaker details

